

FORM PTO-1390
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

57.0265 US PCT

TRANSMITTAL LETTER TO THE UNITED STATE
DESIGNATED/ELECTED OFFICE (DO/EO/US
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5

09/581485

INTERNATIONAL APPLICATION NO
PCT/GB98/03700INTERNATIONAL FILING DATE
10 December 1998PRIORITY DATE CLAIMED
13 December 1997

TITLE OF INVENTION Stabilizing clayey formations

APPLICANT(S) FOR DO/EO/US Coveney, Peter Vivien; Watkinson, Michael; Whiting, Andrew; Boek, Edo Sicco


Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1)
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(3)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19(35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

Express Mail # EK802769844US

U.S. APPLICATION NO. 09/581485 INTERNATIONAL APPLICATION NO.		ATTORNEY'S DOCKET NUMBER																																																			
17. <input checked="" type="checkbox"/> The following fees are submitted BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$970.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO. \$840.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$760.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00 ENTER APPROPRIATE BASIC FEE AMOUNT =		CALCULATIONS PTO USE ONLY <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">ENTER APPROPRIATE BASIC FEE AMOUNT =</td> <td style="width: 50%; text-align: right;">\$ 840.00</td> </tr> <tr> <td colspan="2">Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).</td> </tr> <tr> <td> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%;">CLAIMS</th> <th style="width: 20%;">NUMBER FILED</th> <th style="width: 20%;">NUMBER EXTRA</th> <th style="width: 40%;">RATE</th> </tr> <tr> <td>Total claims</td> <td>5 - 20 =</td> <td></td> <td>X \$18.00</td> </tr> <tr> <td>Independent claims</td> <td>2 - 3 =</td> <td></td> <td>X \$78.00</td> </tr> <tr> <td colspan="3">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$260.00</td> </tr> </table> </td> <td style="text-align: right;">\$ -</td> </tr> <tr> <td colspan="2">TOTAL OF ABOVE CALCULATIONS =</td> <td style="text-align: right;">\$ 840.00</td> </tr> <tr> <td colspan="2">Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).</td> <td style="text-align: right;">\$</td> </tr> <tr> <td colspan="2" style="text-align: right;">SUBTOTAL =</td> <td style="text-align: right;">\$</td> </tr> <tr> <td colspan="2">Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</td> <td style="text-align: right;">\$</td> </tr> <tr> <td colspan="2" style="text-align: right;">TOTAL NATIONAL FEE =</td> <td style="text-align: right;">\$ 840.00</td> </tr> <tr> <td colspan="2">Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property</td> <td style="text-align: right;">\$</td> </tr> <tr> <td colspan="2" style="text-align: right;">TOTAL FEES ENCLOSED =</td> <td style="text-align: right;">\$ 840.00</td> </tr> <tr> <td colspan="2" rowspan="2"></td> <td style="text-align: right;">Amount to be:</td> </tr> <tr> <td style="text-align: right;">refunded</td> </tr> <tr> <td colspan="2"></td> <td style="text-align: right;">charged</td> </tr> </table>		ENTER APPROPRIATE BASIC FEE AMOUNT =	\$ 840.00	Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%;">CLAIMS</th> <th style="width: 20%;">NUMBER FILED</th> <th style="width: 20%;">NUMBER EXTRA</th> <th style="width: 40%;">RATE</th> </tr> <tr> <td>Total claims</td> <td>5 - 20 =</td> <td></td> <td>X \$18.00</td> </tr> <tr> <td>Independent claims</td> <td>2 - 3 =</td> <td></td> <td>X \$78.00</td> </tr> <tr> <td colspan="3">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$260.00</td> </tr> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	Total claims	5 - 20 =		X \$18.00	Independent claims	2 - 3 =		X \$78.00	MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$ -	TOTAL OF ABOVE CALCULATIONS =		\$ 840.00	Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).		\$	SUBTOTAL =		\$	Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		\$	TOTAL NATIONAL FEE =		\$ 840.00	Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property		\$	TOTAL FEES ENCLOSED =		\$ 840.00			Amount to be:	refunded			charged
ENTER APPROPRIATE BASIC FEE AMOUNT =	\$ 840.00																																																				
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%;">CLAIMS</th> <th style="width: 20%;">NUMBER FILED</th> <th style="width: 20%;">NUMBER EXTRA</th> <th style="width: 40%;">RATE</th> </tr> <tr> <td>Total claims</td> <td>5 - 20 =</td> <td></td> <td>X \$18.00</td> </tr> <tr> <td>Independent claims</td> <td>2 - 3 =</td> <td></td> <td>X \$78.00</td> </tr> <tr> <td colspan="3">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$260.00</td> </tr> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	Total claims	5 - 20 =		X \$18.00	Independent claims	2 - 3 =		X \$78.00	MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$ -																																				
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE																																																		
Total claims	5 - 20 =		X \$18.00																																																		
Independent claims	2 - 3 =		X \$78.00																																																		
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00																																																		
TOTAL OF ABOVE CALCULATIONS =		\$ 840.00																																																			
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).		\$																																																			
SUBTOTAL =		\$																																																			
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		\$																																																			
TOTAL NATIONAL FEE =		\$ 840.00																																																			
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property		\$																																																			
TOTAL FEES ENCLOSED =		\$ 840.00																																																			
		Amount to be:																																																			
		refunded																																																			
		charged																																																			
a. <input type="checkbox"/> A check in the amount of \$_____ to cover the above fees is enclosed. b. <input checked="" type="checkbox"/> Please charge my Deposit Account No. <u>04-1579</u> in the amount of \$ <u>840.00</u> to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>04-1579</u> . A duplicate copy of this sheet is enclosed.																																																					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.																																																					
SEND ALL CORRESPONDENCE TO: Schlumberger Technology Corporation 110 Schlumberger Drive, MD1 Sugar Land, Texas 77478																																																					
		SIGNATURE:  NAME 34,476 REGISTRATION NUMBER																																																			
Express Mail # EK802769844US																																																					

ATTORNEY DOCKET NO. 57.0265

Tricia E. van Hooser
(signature)

~~~~~

EXAMINER: Unknown

Sir:  
130.00 CH

1

(1) An Oath or Declaration of the Inventors which complies with 37 CFR 1.497(a) and (b), identifying the application by International application number and international filing date;

(2) An Assignment executed by the Inventors, a recordation form cover sheet with required fee, and an envelope for delivery to the Assignment Branch.

(3) The Commissioner is authorized to charge the fee for this petition and any additional required fee, or credit any excess fee paid, to Deposit Account No. 04-1579(57.0265). An extra copy of this paper is enclosed for charges to the Deposit Account.

Respectfully submitted,



Robin C. Nava  
Reg. No.: 42,926  
Attorney for Applicant(s)

Date: 27-July-2000

Schlumberger Technology Corporation  
110 Schlumberger Drive, MD1  
Sugar Land, Texas 77478  
Ph: (281) 285-4524  
Fax: (281) 285-8569

In Duplicate

- 1 -

STABILIZING CLAYEY FORMATIONS

This invention relates to compositions and methods for stabilizing subterranean clayey formations surrounding a borehole. More specifically, it pertains to clay stabilizing additives for aqueous fluids used in drilling, completing and maintaining boreholes.

## BACKGROUND OF THE INVENTION

When geological formations containing water swelling clays come in contact with water, particularly fresh water, clays in the formations may swell and/or disperse with attendant loss of permeability and/or mechanical strength to interfere with recovery of petroleum or other minerals from the formations. Swelling and dispersion occur when aqueous fluids used in oil recovery come in contact with the clays. Clayey formations are often impermeable or have low permeability or lose part or all of their permeability on contact of the clays with water or water base systems such as injection fluids, drilling muds, stimulation fluids and gels. Dispersed clays may also invade a permeable producing formation during drilling to create low permeability zone in the vicinity of the borehole.

Given the importance and the ubiquity of clayey or shaley formations, it is not surprising that much effort has been put into developing and improving additives for clay or shale inhibition. Various methods and additives can be found for example in the United States Patent Nos. 5342530, 5211250, 5197544, 5152906, 5099923, 5097904, 5089151, 4842073, 4830765, 4828726, 4563292, 4536303, 4536304, 4536305, 4505833, 4497596, 4172800 and 3578781.

These additives usually are salts and/or polymers which effectively prevent the water from permeating the clay.

Furthermore, it is known to consolidate sandstone and other highly porous and weak formations with a fluid containing

- 2 -

polymerizable materials, such as resins or isocyanates in combination with diols. Those methods are described for example in the United States Patent Nos. 5242021, 5201612, 4965292, 4761099, 4715746, 4703800, 4137971, or 3941191. It is however  
5 important to note that the permeability of sandstones and similar formations differ from those of shale formations by several orders of magnitude. The consolidation of highly porous, unstable sandy formations and shale formations with a very low porosity are therefore generally recognized in the art as  
10 separate technical fields.

In technical fields unrelated to the present invention, efforts to form composites of clayey materials have been described. The known methods of forming so-called "nanocomposites" include the  
15 addition of a reactive (monomeric or polymeric) species to clays which have been previously treated with another compound with which it will react. The ensuing chemical reaction can occur in one of two ways: either the second additive is capable of physically cross-linking the polymer, or it promotes further  
20 self-polymerization. Such processes can result in nanocomposite silicate-polymers which attain a certain degree of stiffness, strength and barrier properties with far less ceramic content than comparable glass- or mineral-reinforced polymers. As such they are far lighter in weight than conventionally filled  
25 polymers.

Examples are provided by the following references: 'Polyamide-Organoclay Composites', S. Fujiwara and T. Sakamoto, Japan, Patent 51 109,998, 1976; 'Composite Material Containing a  
30 Layered Silicate', A. Usaki et al, Toyota, U.S., U.S. Patent 4, 889, 885, (1989); M.S. Wang and T.J. Pinnavaia, 'Clay-Polymer Nanocomposites Formed from Acidic Derivatives of Montmorillonite and an Epoxy Resin', *Chem. Mater.*, **6**, 468, (1994); T.J. Pinnavaia et al, 'On the Nature of Polyimide-Clay Hybrid  
35 Composites', *Chem. Mater.*, **6**, 573, (1994); P.B. Messersmith and E.P. Giannelis, 'Synthesis and Characterization of Layered Silicate-Epoxy Nanocomposites', *Chem. Mater.*, **6**, 1719, (1994); T. Lan and T.J. Pinnavaia, 'Clay-Reinforced Epoxy

- 3 -

Nanocomposites, *Chem. Mater.*, **6**, 2216, (1994); E.P. Giannelis, 'Polymer Layered Silicate Nanocomposites', *Adv. Mater.*, **8**, 29, (1996); T.J. Pinnavaia et al, 'Epoxy Self-Polymerization in Smectite Clays', *J. Phys. Chem. Solids*, **57**, 1005, 1996. In spite  
5 of the stabilization and strengthening that these additives impart to the resultant nanocomposite materials, there are currently several limitations to this technology which are important from an oilfield perspective. One is that the established methodology necessarily involves a high-temperature  
10 curing process for the chemical reactions to take place; another is that such an approach inevitably results in the production of composites in which the silicate is delaminated and randomly distributed within the polymer matrix. No technology has been developed which is capable of stabilizing clay silicates under  
15 ambient, aqueous conditions.

In view of the above, it is an object of the invention to provide a novel method of stabilizing subterranean clayey formations surrounding a borehole. It is another, more specific  
20 object of the invention to provide clay stabilizing additives for aqueous fluids used in drilling, completing and servicing boreholes under conditions appropriate to drilling oil wells.

#### SUMMARY OF THE INVENTION

This invention is concerned with the identification of a wide range of compounds which are capable of strengthening and stabilizing clay and shale minerals through a process of in-situ  
30 polymerization. These diverse compounds (or "additives") include both monomers and polymers, in aqueous solution or suspension. The resulting nanocomposite materials, which have dramatically enhanced mechanical properties compared with the original clay and shale samples, have a vast range of potential materials-  
35 science and materials-technology applications both within and outside the oilfield.

- 4 -

In chemical terms, the invention comprises a wide variety of additives which are capable of stabilizing clay films in aqueous solution. The additives that have been tested encompass four broad areas: (1) species which are capable of intercalating clay galleries and affording stabilization such as diamines, polyethylene glycols (PEGs), polypropylene glycols (PPGs) and polymeric diamines; (2) reagents which are capable of undergoing condensation reactions and thus polymerizing in-situ such as diamines, aldehydes, ketones, dicarboxylic acids; (3) reagents which are capable of ring opening of epoxides or acrylates effecting polymerization in-situ such as alcohols, amines; (4) reagents which are capable of self-polymerization within clay galleries such as alkenes. All of these techniques provide considerable stabilization over untreated films.

There are three main applications of the invention. Firstly, it is envisaged that a drilling mud formulation containing a combination of the specified compounds described below may be used as a clay and shale swelling inhibitor fluid, to maintain the integrity of the wellbore during conventional drilling operations. Secondly, a completion fluid formulation containing a combination of the same compounds may be used for general remedial operations in the wellbore. Finally, the invention may be used to achieve the goal of "casingless drilling", that is to achieve with one and the same drilling and completion fluid the equivalent result of what is today obtained through a combination of drilling, casing and cementing operations.

These and other features of the invention, preferred embodiments and variants thereof, and further advantages of the invention will become appreciated and understood by those skilled in the art from the detailed description following below.

35

## BRIEF DESCRIPTION OF DRAWINGS

FIG 1. shows the cuttings hardness data for the combinations of DAP, DEC, EDA, BNH2 and Glyoxal, together with the



- 5 -

corresponding results for each of the components on its own in water.

FIG 2 shows the resulting change in permeability as a reaction in accordance with an example of the present invention progresses through a core sample.

#### EXAMPLE(S) FOR CARRYING OUT THE INVENTION

The level of clay stabilization provided by different additives and formulations were assessed by several laboratory techniques.

All combinations of chemical compounds were initially assessed using thin clay films as the substrate. In this testing procedure a small piece of montmorillonite clay film is treated with a combination of reagents which might be capable of cross-linking or polymerizing inside clay layers and examining the resulting clay for strength and rigidity in a qualitative manner. The treated films were extracted with chloroform and the extract analysed by Mass Spectrometry for direct evidence of polymerisation. The most definitive evidence for polymerisation was obtained by solid state NMR on films produced from Laponite, a synthetic clay without the paramagnetic impurities present in the natural montmorillonite clay.

Some of the combinations were then assessed in an outcrop shale, Oxford Clay, by measuring the permeability change induced in a shale core and/or the change in hardness of shale cuttings when exposed to the reactive chemistry.

##### (1) Clay Film Tests

In this testing procedure a small piece of montmorillonite clay film is treated with a combination of reagents which might be capable of cross-linking or polymerizing inside clay layers and examining the resulting clay for strength and rigidity in a qualitative manner.

- 6 -

All the film tests described below were performed on the same batch of montmorillonite clay films. The films have been stored in a refrigerator in sealed Petri dishes and checked

5 periodically by infrared spectroscopy to ensure integrity of the samples.

A very wide range of potential stabilizers were examined in terms of their chemical reactivity, structure and the conditions  
10 under which the tests were performed. All tests have been performed in an identical manner by the addition of a piece of montmorillonite film to an aqueous solution of the intercalator (5cm<sup>3</sup> of a 5% w/w solution), the pH of which had already been adjusted (where necessary, with 10% v/v aqueous HCl solution).

15 The potential cross-linking reagent was then immediately added. The intercalating reagents investigated were BNH<sub>2</sub>, B2P, B4P, DAP, DEA, EA, EDA, EG, HQ, P, PA, PC, PEDG, PPD, PPDG and STAPLEX650 and the potential cross-linkers A, AA, BA, DEC, DEM, DEO, DIT, DMM, EPP, FS, GA, MA, OA, PPDGE, PO and styrene. Cross-linkers  
20 were added as either neat reagents (0.5cm<sup>3</sup> A, DEM, DEO, DIT, DMM, EPP, MA, PPDGE, PO, styrene and 0.5g BA) or as aqueous solutions (5cm<sup>3</sup> 5% w/w solution AA, DEC, OA; 1cm<sup>3</sup> of 50% w/w solution GA and 5cm<sup>3</sup> of a 37% w/v solution FS). Films were then allowed to stand in the reaction mixture for 1 day before  
25 washing with distilled water and were then placed in fresh distilled water to monitor their long term stability. (The abbreviations used in this paragraph and the following are listed in Appendix 1.)

30 The montmorillonite film tests provided a means of ascertaining the potential of a number of reagent combinations; the results are summarized in Table 1 (Appendix 2). (In the table of Appendix 2, the term "Stable" applied to describe the film stability means that such films do not dissolve in water, while  
35 "Exfoliates" simply means they are visibly fatter after treatment. The latter term does not mean the films fall apart; this only happens if extreme exfoliation occurs and the resulting material does not have a matrix around it which

- 7 -

"sets".) These combinations can be broadly divided into four categories, i.e., (a) Substrate intercalation; (b) Condensation stabilization with no pH adjustment; (c) Stabilization through epoxide ring opening under neutral or acidic conditions; (d)  
5 Substrate in-situ polymerization.

Physical intercalation of the investigated compounds into the interlamellar layers of the clay, the clay galleries, is a condition for the subsequent chemical reactions, as mentioned  
10 below under (b), (c) and (d), to occur. Intercalation itself without chemical reaction, described under (a), is in some cases capable of enhancing the stability of the clay. However, it is the subsequent reaction that gives an increased clay stability.

15 (a) Substrate Intercalation

Three films (3, 6 and 24, Table 1) were treated with potential intercalators without any chemical cross-linking reagent capable of forming covalent bonds. It was found that by mixing PEG and  
20 BNH<sub>2</sub> solutions in equal quantities a very stable film could be produced. This is consistent with the effect of BNH<sub>2</sub> alone, but shows considerable improvement on PEG stabilization, indicating that amines are considerably superior for the stabilization of clays.

25

(b) Condensation Stabilization

These films are generally the most robust films that have been produced. Particularly impressive properties being associated  
30 with films 1, 7, 34, 37, 40, 42 and 43 (Table 1). These types of additives are preferred for bore-hole stabilization. In addition to these treatments, a number of other treatments are available (films 50, 51, 52 and 53 are particularly stable) and that some very interesting effects can occur within apparently similar  
35 reactant sets; e.g. although EA provides a stable film with DEC (film 53), the related DEA does not, and the film decomposes upon soaking in fresh water (film 54). Attempts to produce polyesters appears to have been less successful (films 55-62).

- 8 -

However, it is interesting to note that both film 57 and 61 were both very much more robust than any of the other films in this series.

- 5 The condensation reactions required to provide stabilization in clay galleries involve equilibria between reactants and condensation products. Under aqueous conditions the reactants will clearly be favored, a situation akin to that pertaining in drilling fluids. However, upon intercalation in the
- 10 interlamellar layer an anhydrous environment is created, through the concomitant expulsion of water. These conditions facilitate the condensation process and lead to film stabilization whilst preventing substrate polymerization in the drilling mud.

15 (c) Ring Opening Stabilization

The chemical process achieved by the ring opening of epoxides is akin to the synthesis of a number of polymers, including e.g. PEG, in which a chain reaction is started after initial ring

20 opening resulting in an *in situ* epoxide polymerization. To produce a stable film, acidic solutions is employed; the acidity of which is dependent upon both the intercalator and the cross-linker. When the diamines (EDA, DAP and BNH<sub>2</sub>) are used, only mildly acidic (ca. pH 6) conditions are required with both PO

25 and EPP to produce very robust films (10, 11, 14, 15 and 25-27, Table 1). With PPDGE, much more acidic conditions (pH 2) produce more impressive films (28, 29) than at less acidic pH (films 9, 29). Stable films can be produced by adding a small quantity of a diamine solution to the bulk PEG liquor and treating them with

30 epoxides under mildly acidic conditions (16B and 17). Films can also be stabilized with PEG and all of the epoxides, although more acid conditions (pH 2) are required (30-32); the resultant films are very soft but stable.

35 (d) Substrate in-situ Polymerization

Of the four methods investigated to produce stable films, this has been the least successful. This is perhaps not entirely

- 9 -

surprising since the polymerisation of a substrate necessitates a reaction initiator and it is difficult to control this process. This problem is highlighted by film 12 which resulted in the entire test solution polymerising. Generally, this reaction type produces exfoliated films (2, 4, 5, 8 and 20), which are often considerably swollen and blistered, indicating that the reactions are rapid and too aggressive for the films. Whether these reactions are of use to stabilise shale is currently an open question. Clearly, a solution which polymerises, as is the case for 12, is undesirable, but the stable film produced with EDA and A (film 33) indicates that there is some potential in this methodology.

15 Evidence for absorption into the interlamellar layer of substrates

It is important to establish that the reagents are actually binding within the interlamellar layers of the films rather than merely polymerizing on the film surface. Evidence for an intercalation effect was established through the use of X-ray diffraction studies on a number of stable films; see Table 1. It can be clearly seen that changing the intercalating substrate changes the d-spacings of the montmorillonite films. What perhaps provides more conclusive evidence of a genuine polymerization within the interlamellar layer are the range of d-spacings that are observed for the intercalating substrate, EDA. Values ranging from 12.72 Å (film 36) to 17.72 Å (film 34) are observed. Both of these films are stable, flexible and hard and show no signs of exfoliation typical of swelling due to water viz. marked whitening.

Perhaps even more revealing are the different spacings observed for the same substrates in films 36-38. Although the treated films all have relatively similar properties (with perhaps most superior behavior attributable to film 37) the d-spacings are different. The two films (36 and 38) which have been adjusted to acidic pH both show similar d-spacings of ca. 13 Å whereas film

- 10 -

37 (in which unchanged substrates have been employed) shows a d-spacing of ca. 15 Å.

#### Stability of Treated Films

5 All films that could be, were washed thoroughly with water and then placed in distilled water to investigate their long term stability under saturated aqueous conditions. All of the treated films (1, 7, 10, 14, 16B, 17, 25, 27-43, 50, 52, 57, 61, 63-66) 10 show very impressive stability with only films 31, 32 and 61 showing any signs of decomposition after up to four months. Films 31 and 32 do show some exfoliation but can still be handled quite readily. Film 61, however, is too fragile to handle and decomposes. One interesting effect is observed after 15 prolonged soaking of films treated with EPP. All, with the exception of film 25, become covered with a sticky coating and some (10, 14, 17) become transparent. The sticky coating can be accounted for due to epoxide leaching from the clay and polymerising on its surface. The second effect is more difficult 20 to account for but must relate to a change in the refractive index of the film in some way upon coating with the polymerising epoxide. This effect also substantiates the absorption of substrates into the clay films (hence confirming X-ray diffraction results and extraction studies for 10) as all 25 substrates external to the clay are initially removed on rinsing. It is worth noting that although the physical properties of these films have changed over a period of time their d-spacings are virtually unchanged. The d-spacings of films 1, 7, 10, 14, 16B and 17 after four months soaking in 30 water are 14.0 Å, 14.0 Å 15.0 Å, 17.2 Å, 17.2 Å and 17.9 Å respectively. The biggest difference between previous measurements and the post-soaking results lie in film 10, which shows a change of nearly 0.6 Å.

#### 35 Direct Evidence of Polymerization.

After extraction of the treated clays (treatments 1, 7, 10, 11, 14, 15, 20, 25, 28, 36, 40 and 42) with chloroform, fast atom bombardment (FAB) mass spectrometry indicates that

- 11 -

polymerization of the additives has occurred. However, it is also likely that most of the extracted material is derived from surface polymerization since the d-spacings between the clay galleries do not alter upon extraction. It is nevertheless  
5 indicative that polymerization must be occurring within the clay galleries.

The most definitive evidence for polymerization has been obtained by solid-state nmr studies using laponite, subjected to  
10 treatments 1 and 7 (Table 1). Magic-angle  $^{13}\text{C}$  NMR clearly shows that all formaldehyde has been polymerised in both samples. For the sample from treatment 1 (BNH2 and FS), three major signals are found at  $\delta 15$ , 47 and a large broad peak centred at  $\delta 70$  (covering 25 ppm). The highest field signal is due to the methyl  
15 C's, while the remaining signals are due to aminal, methylene and methine carbons. This convincing evidence for polymerisation within the clay was repeated with the sample obtained from treatment 7 (EDA and FS), with peaks at  $\delta 34$ , 45, 54, 67 and 167. The most interesting peak (at 176 ppm) is indicative of either  
20 imine or iminium ion formation. The remaining peaks are consistent with EDA methylene C's, aminal C's, poly-acetal C's (from poly-formaldehyde), and mixed hemi-aminal systems.

In the following the results of two further tests are described  
25 examining quantitatively the effect of the disclosed method on the clay material:

#### Cuttings Hardness Tests

30 Oxford Clay cuttings of between 2 and 4 mm diameter were soaked in the test fluids under static, ambient temperature conditions for 48 hrs. At the end of this period the cuttings were removed from the solution by sieving and placed in the test device. This consisted of a steel plate with an array of holes drilled  
35 in it. The cuttings were forced through the holes by a piston attached to a screw thread. Data were recorded as torque on the screw thread against number of turns as the cuttings were

- 12 -

extruded. A higher torque value indicates greater clay inhibition.

FIG 1. shows the cuttings hardness data for the combinations of DAP, DEC, EDA, BNH2 and Glyoxal, together with the corresponding results for each of the components on its own in water. With the exception of EDA + DEC, the performance of the combinations was significantly superior to that of the individual components.

10

#### Permeability of Shale

An Oxford Clay core was used to assess the effect of one of the reactive chemistries on permeability. The cylindrical core approximately 25 mm in diameter and 30 mm long was confined in a Hassler cell at a pressure of 8.5 MPa. One end of the core was exposed to fluid at 8.0 MPa and fluid samples were collected from the other end at atmospheric pressure to determine flowrate and therefore permeability.

20

To establish an initial permeability for the untreated core it was first exposed to a synthetic pore fluid. Once a stable flow rate was established this fluid was switched over to the reactive chemistry, BNH2 and Glyoxal, at 5wt% each in 0.1M CaCl<sub>2</sub> and adjusted to pH 9. FIG 2 shows the resulting change in permeability as the reaction progresses through the core.

25



- 13 -

## CLAIMS


1. A method of stabilizing a clayey geological formation  
5 surrounding a hydrocarbon well comprising the step of  
injecting from a surface reservoir a fluid comprising a  
first and a second reactant, letting said fluid contact  
said clayey formation; and stabilizing said formation by  
10 using a reaction between said first and said second  
reactant, wherein said reaction of said first and said  
second reactant is essentially initiated in the presence of  
said clayey material.
2. The method of claim 1, wherein the reaction is  
15 characterized by substrate intercalation or condensation  
stabilization with or without pH adjustment or  
stabilization through epoxide ring opening under neutral or  
acidic conditions or substrate in-situ polymerization or a  
combination thereof.
3. The method of claim 1, wherein the first reactant is a  
20 diamine or a polyhydric alcohol and the second reactant  
comprises at least one carbonyl group.
4. The method of claim 1, wherein the first reactant is a  
25 diamine or a dihydric alcohol and the second reactant  
comprises at least one carbonyl group.
5. A method of drilling a wellbore into a potentially  
30 hydrocarbon bearing formation comprising the steps of  
drilling part of said wellbore through a clayey formation  
and using a method in accordance with claim 1 to stabilize  
said formation.

**Appendix 1. List of abbreviations.**

|    |                  |                                                                                                                                                                                                                                        |
|----|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | .A               | Acrolein                                                                                                                                                                                                                               |
| 5  | AA               | Adipic acid                                                                                                                                                                                                                            |
|    | BA               | Boric acid                                                                                                                                                                                                                             |
| 10 | BNH <sub>2</sub> | CH <sub>3</sub> CH(NH <sub>2</sub> )CH <sub>2</sub> -[OCH(CH <sub>3</sub> )CH <sub>2</sub> ] <sub>1</sub> -[OCH <sub>2</sub> CH <sub>2</sub> ] <sub>m</sub> -<br>[OCH <sub>2</sub> CH(CH <sub>3</sub> )] <sub>n</sub> -NH <sub>2</sub> |
|    | B2P              | 2- <sup>t</sup> Butylphenol                                                                                                                                                                                                            |
|    | B4P              | 4- <sup>t</sup> Butylphenol                                                                                                                                                                                                            |
| 15 | DAP              | 1,5-Diaminopentane                                                                                                                                                                                                                     |
|    | DEA              | Diethanolamine                                                                                                                                                                                                                         |
| 20 | DEC              | Diethylcarbonate                                                                                                                                                                                                                       |
|    | DEM              | Dimethylmalonate                                                                                                                                                                                                                       |
|    | DEO              | Diethyloxalate                                                                                                                                                                                                                         |
| 25 | DIT              | Diisopropyl-D-tartrate                                                                                                                                                                                                                 |
|    | DMM              | Dimethylmaleate                                                                                                                                                                                                                        |
| 30 | EA               | Ethanolamine                                                                                                                                                                                                                           |
|    | EDA              | Ethylene-1,2-diamine or 1,2-diaminoethane                                                                                                                                                                                              |
|    | EG               | Ethylene glycol                                                                                                                                                                                                                        |
| 35 | EPP              | 1,2-Epoxy-3-phenoxypropane                                                                                                                                                                                                             |
|    | FS               | 37 % w/v Formaldehyde solution                                                                                                                                                                                                         |
| 40 | GA               | 50% w/v Glutaric aldehyde solution                                                                                                                                                                                                     |
|    | HQ               | Hydroquinone                                                                                                                                                                                                                           |
|    | MA               | Methyl acrylate                                                                                                                                                                                                                        |
| 45 | OA               | Oxalic acid                                                                                                                                                                                                                            |
|    | P                | Phenol                                                                                                                                                                                                                                 |
| 50 | PA               | 2-Acetylpyridine                                                                                                                                                                                                                       |
|    | PC               | 2-Pyridinecarboxaldehyde                                                                                                                                                                                                               |

PO Propylene oxide


PEDG Polyethylenediglucamide

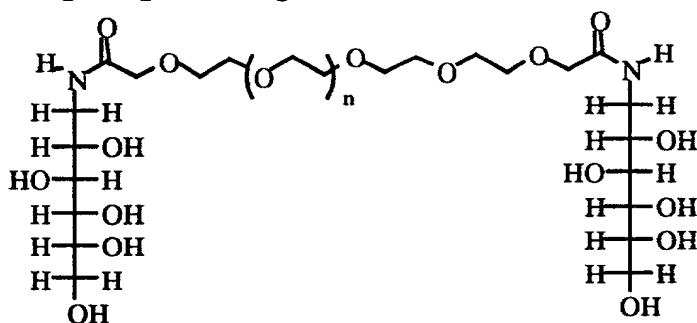

5


PPD 1,2 Propanediol

PPDG Polypropylenediglucamide

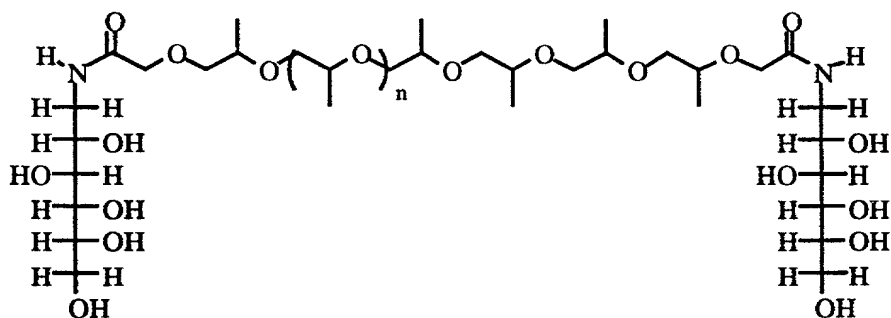


10

PPDGE



PEG



## Appendix 2.

Table 1 (Properties of clay nanocomposite materials synthesized)

| Film | Intercalator           | Cross-linker                            | pH  | d-spacing (Å) | Film Stability |        | Film Condition |          |              |
|------|------------------------|-----------------------------------------|-----|---------------|----------------|--------|----------------|----------|--------------|
|      |                        |                                         |     |               | Exfoliates     | Stable | Brittle        | Flexible | Hard or Soft |
| 1    | BNH <sub>2</sub>       | FS                                      | na  | 14.0          |                | Yes    |                | Yes      | Hard         |
| 2    | BNH <sub>2</sub>       | MA/H <sub>2</sub> O <sub>2</sub>        | na  | -             | Yes            |        | Yes            |          | Hard         |
| 3    | BNH <sub>2</sub> /PEG  | -                                       | na  | -             |                | Yes    | Yes            |          | Hard         |
| 4    | PEG                    | MA                                      | na  | -             | Yes            |        |                |          | Soft         |
| 5    | PEG                    | MA/H <sub>2</sub> O <sub>2</sub>        | na  | -             | Yes            |        |                |          | Soft         |
| 6    | PEG                    | BA                                      | na  | -             | Yes            |        |                |          |              |
| 7    | EDA                    | FS                                      | na  | 14.4          |                | Yes    |                | Very     | Hard         |
| 8    | FS                     | Catalytic H <sub>2</sub> O <sub>2</sub> | na  | -             | Yes            | Yes    | Yes            |          | Hard         |
| 9    | EDA                    | PPDGE                                   | 6   | -             |                | Yes    | Yes            | Some     |              |
| 10   | EDA                    | EPP                                     | 6   | 15.6          |                | Yes    |                | Yes      | Hard         |
| 11   | EDA                    | PO                                      | 6   | -             |                | Yes    |                | Yes      |              |
| 12*  | EDA                    | A                                       | na  | -             |                |        |                |          |              |
| 13   | BNH <sub>2</sub>       | PPDGE                                   | 6   | -             | Yes            | Yes    | Yes            |          | Hard         |
| 14   | BNH <sub>2</sub>       | EPP                                     | 6.4 | -             |                | Yes    |                | Yes      | Hard         |
| 15   | BNH <sub>2</sub>       | PO                                      | 6.6 | -             |                | Yes    | Yes            | Some     | Hard         |
| 16B  | 4PEG:1BNH <sub>2</sub> | EPP                                     | 4   | 17.3          |                | Yes    |                | Yes      | Hard         |
| 17   | 4PEG:1EDA              | EPP                                     | 5   | 17.7          |                | Yes    | Slightly       | Yes      | Hard         |
| 18   | PEG                    | EPP                                     | na  | -             | Yes            |        |                |          | Soft         |
| 19   | PEG                    | PO                                      | na  | -             | Yes            |        |                |          | Soft         |
| 20   | -                      | Styrene/H <sub>2</sub> O <sub>2</sub>   | na  | -             | Yes            |        |                |          | Soft         |
| 21   | PEG                    | EPP/H <sub>2</sub> O <sub>2</sub>       | na  | -             | Yes            |        |                |          | Soft         |
| 22   | PEG                    | PO/H <sub>2</sub> O <sub>2</sub>        | na  | -             |                |        |                |          | Soft         |
| 23   | DAP                    | FS                                      | na  | -             |                | Yes    | Yes            |          | Hard         |
| 24   | DAP                    | -                                       | na  | -             |                | Yes    |                | Yes      | Hard         |
| 25   | DAP                    | EPP                                     | 6.5 | 18.6          |                | Yes    | Slightly       |          | Hard         |
| 26   | DAP                    | PO                                      | 6.5 | -             |                | Yes    | Yes            |          |              |
| 27   | DAP                    | PO/EPP                                  | na  | 17.2          |                | Yes    | Yes            |          | Hard         |
| 28   | EDA                    | PPDGE                                   | 2   | 14.1          |                | Yes    |                | Yes      | Hard         |
| 29   | BNH <sub>2</sub>       | PPDGE                                   | 2   | 15.9          |                | Yes    | Yes            |          | Hard         |
| 30   | PEG                    | PPDGE                                   | 2   | 17.5          |                | Yes    |                | Yes      | Soft         |
| 31   | PEG                    | PO                                      | 2   | 16.5          | Yes            | Yes    |                |          | Soft         |

Table 1 (continued)

| Film | Intercalator     | Cross-linker | pH | d-spacing (Å) | Film Stability |        | Film Condition |          |              |
|------|------------------|--------------|----|---------------|----------------|--------|----------------|----------|--------------|
|      |                  |              |    |               | Exfoliates     | Stable | Brittle        | Flexible | Hard or Soft |
| 32   | PEG              | EPP          | 2  | 16.8          | Yes            | Yes    |                |          | Soft         |
| 33   | EDA              | A            | na | 15.1          |                | Yes    |                | Yes      | Hard         |
| 34   | EDA              | PC           | na | 17.7          |                | Yes    |                | Yes      | Hard         |
| 35   | EDA              | PA           | na | 15.1          |                | Yes    |                |          | Hard         |
| 36*  | EDA              | AA           | 6  | 12.7          |                | Yes    |                | Yes      | Hard         |
| 37   | EDA              | AA           | na | 15.0          |                | Yes    |                | Very     | Hard         |
| 38*  | EDA              | AA           | 2  | 13.0          |                | Yes    |                | Yes      | Hard         |
| 39*  | EDA              | OA           | 6  | 15.5          |                | Yes    | Yes            | Slightly | Hard         |
| 40   | EDA              | OA           | na | 15.1          |                | Yes    |                | Very     | Hard         |
| 41*  | EDA              | OA           | 2  | 15.6          |                | Yes    |                | Yes      | Hard         |
| 42   | EDA              | GA           | na | 15.5          |                | Yes    |                | Yes      | Hard         |
| 43   | BNH <sub>2</sub> | GA           | na | -∞            | Yes            | Yes    |                | Yes      |              |
| 44   | PEDG             | PO           | 6  | -             | Yes            |        |                |          |              |
| 45   | PEDG             | EPP          | 6  | -             | Yes            |        |                |          |              |
| 46   | PEDG             | PDGE         | 6  | -             | Yes            |        |                |          |              |
| 47   | PPDG             | PO           | 6  | -             | Yes            |        |                |          |              |
| 48   | PPDG             | EPP          | 6  | -             | Yes            |        |                |          |              |
| 49   | PPDG             | PDGE         | 6  | -             | Yes            |        |                |          |              |
| 50   | EDA              | DEC          | na | -             |                | Yes    |                | Very     | Hard         |
| 51   | BNH <sub>2</sub> | DEC          | na | -             |                | Yes    | Yes            |          | Hard         |
| 52   | DAP              | DEC          | na | -             |                | Yes    |                | Very     | Hard         |
| 53   | EA               | DEC          | na | -             |                | Yes    |                | Yes      | Hard         |
| 54   | DEA              | DEC          | na | -             |                | ⊥      |                |          | Soft         |
| 55   | EG               | DEM          | na | -             | Yes            | ⊥      |                |          | Soft         |
| 56   | EG               | DMM          | na | -             | Yes            | ⊥      |                |          | Soft         |
| 57   | EG               | DIT          | na | -             | Yes            | Yes    |                | Yes      |              |
| 58   | EG               | DEO          | na | -             | Yes            | Yes⊥   |                | Yes      |              |
| 59   | PPD              | DEM          | na | -             | Yes            |        |                |          | Soft         |
| 60   | PPD              | DMM          | na | -             | Yes            | ⊥      |                |          | Soft         |
| 61   | PPD              | DIT          | na | -             |                | Yes    |                | Yes      |              |
| 62   | PPD              | DEO          | na | -             | Yes            | ⊥      |                |          | Soft         |
| 63   | HQ               | FS           | na | -             |                | Yes    |                | Yes      | Hard         |
| 64   | P                | FS           | na | -             | Some           | Yes    |                | Yes      | Hard         |

|    |     |    |    |   |     |     |          |     |      |
|----|-----|----|----|---|-----|-----|----------|-----|------|
| 65 | B4P | FS | na | - |     | Yes |          | Yes |      |
| 66 | B2P | FS | na | - | Yes | Yes | Slightly | Yes | Hard |

+ film 12 resulted in polymerisation of the intercalator solution on addition of the acrolein

\* considerable precipitation of intercalator/cross-linker complex

ω although film 43 is stable no d-spacing was measured due to the non-homogeneous nature of the treated film

⌞ All these films decompose upon overnight soaking in fresh water

1/2

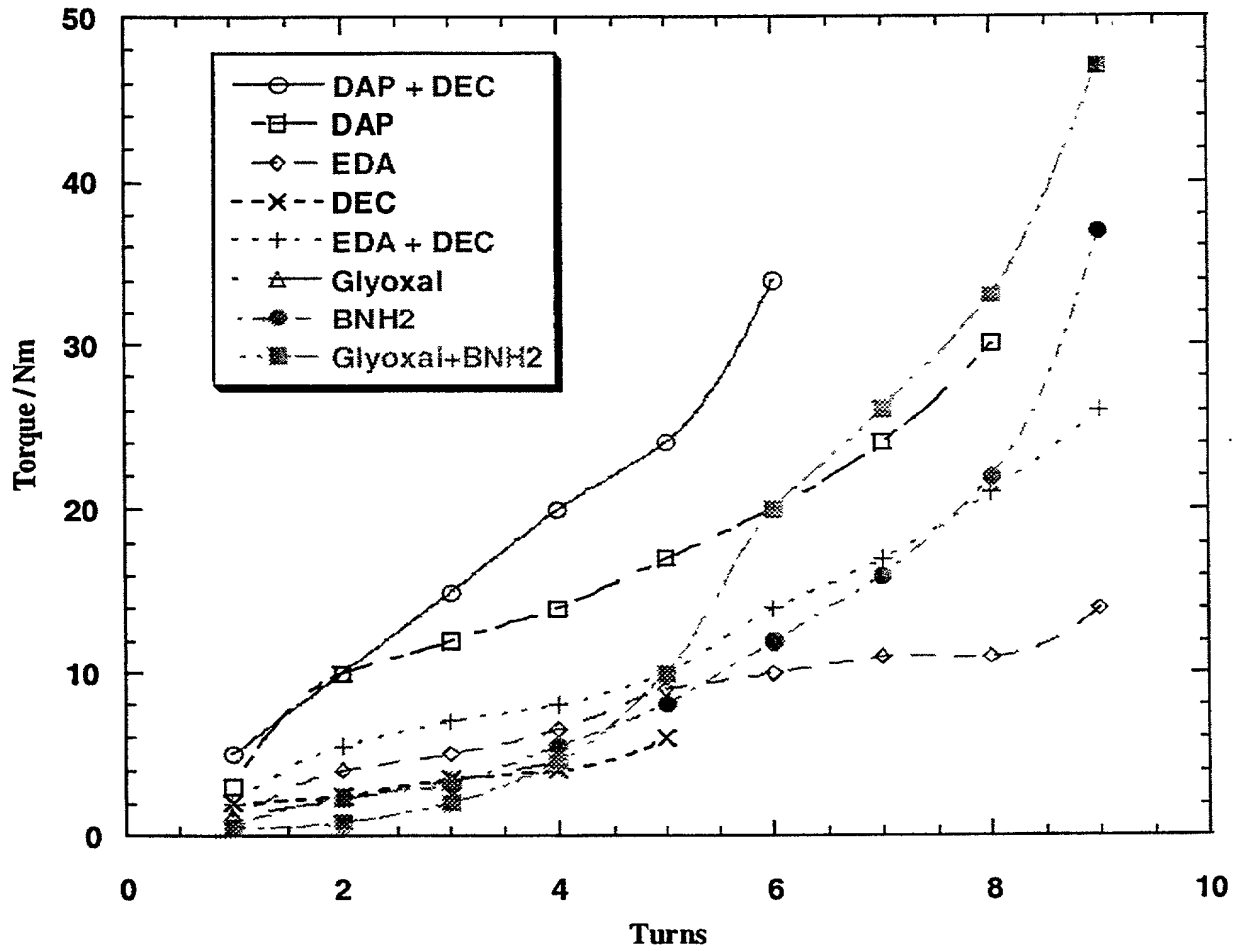


FIG. 1

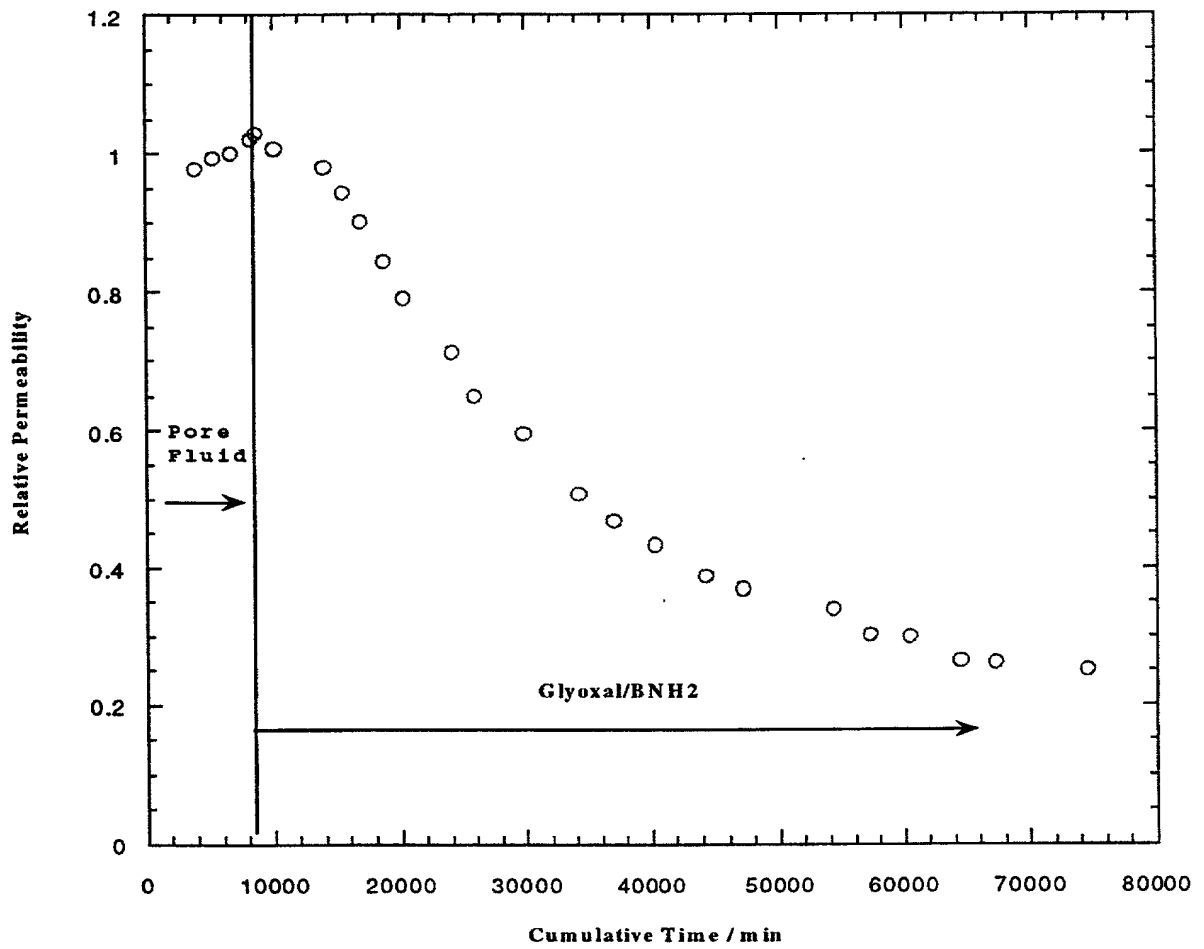


FIG. 2



Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

**DECLARATION FOR PATENT APPLICATION**☐ Declaration Submitted **WITH** Initial Filing      **OR**      ☒ Declaration Submitted **After** Initial Filing**Attorney Docket Number:**  
**First-Named Inventor:**57.0265  
Peter Vivien Coveney**COMPLETE IF KNOWN:****Application Number:**  
**Filing Date:**  
**Group Art Unit:**  
**Examiner's Name:**

Filed Herewith

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**STABILIZING CLAYEY FORMATIONS**

the specification of which:

☐ is attached hereto as Attorney Docket No.: \_\_\_\_\_**OR**☒ was filed on June 13, 2000      ☒ as United States Application No. 09/581,485 or  
☐ PCT International Application No. \_\_\_\_\_  
☐ and was amended on \_\_\_\_\_ (MMDDYY).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 1.19(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

| Prior Foreign<br>Application Numbers | Country | Foreign Filing Date<br>(MMDDYY) | Priority Not<br>Claimed | Certified Copy Attached? |                                     |
|--------------------------------------|---------|---------------------------------|-------------------------|--------------------------|-------------------------------------|
|                                      |         |                                 |                         | Yes                      | No                                  |
| 9726331.3                            | GB      | DEC 13, 1997                    |                         | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| PCT/GB98/03700                       | PCT     | DEC 10, 1998                    |                         | <input type="checkbox"/> | <input type="checkbox"/>            |
|                                      |         |                                 |                         | <input type="checkbox"/> | <input type="checkbox"/>            |

☐ Additional foreign application numbers are listed in a supplemental priority data sheet PTO/SB/02B, attached hereto.

Please type a + sign inside this box ☐

☐ I hereby claim the benefit under Title 35 U.S.C. § 1.19(e) of any United States provisional application(s) listed below.

| Application Number | Filing Date |
|--------------------|-------------|
|                    |             |
|                    |             |
|                    |             |

☐ Additional provisional patent application numbers are listed in a supplemental priority data sheet PTO/SB/02B, attached hereto.

I hereby claim the benefit under 35 U.S.C. § 1.20 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph 35 of U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

| US Parent<br>Application Number | PCT Parent Number | Parent Filing Date<br>(MMDDYY) | Parent Patent Number<br>(if applicable) |
|---------------------------------|-------------------|--------------------------------|-----------------------------------------|
|---------------------------------|-------------------|--------------------------------|-----------------------------------------|

☐ Additional US or PCT international application numbers are listed in a supplemental priority data sheet PTO/SB/02B, attached hereto.

As a named inventor, I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

| Name              | Registration Number | Name               | Registration Number |
|-------------------|---------------------|--------------------|---------------------|
| Gordon G. Waggett | <u>34,476</u>       | Victor Segura      | <u>44,329</u>       |
| Robin C. Nava     | <u>42,926</u>       | J. H. Bouchard     | <u>29,286</u>       |
| John J. Ryberg    | <u>31,134</u>       | Wayne I. Kanak     | <u>35,564</u>       |
| Steve Christian   | <u>38,106</u>       | Jeffery E. Griffin | <u>36,534</u>       |
| Brigitte Jeffery  | <u>38,925</u>       | Peter Y. Lee       | <u>30,865</u>       |
| Douglas Y'Barbo   | <u>42,239</u>       | William L. Wang    | <u>39,871</u>       |

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information Sheet PTO/SB/02B, attached hereto.

I hereby direct that all correspondence and telephone calls be addressed to:

|         |                                            |           |              |     |              |
|---------|--------------------------------------------|-----------|--------------|-----|--------------|
| Name    | <u>Gordon G. Waggett</u>                   |           |              |     |              |
| Address | <u>Schlumberger Technology Corporation</u> |           |              |     |              |
| Address | <u>110 Schlumberger Drive, MDI</u>         |           |              |     |              |
| City    | <u>Sugar Land</u>                          | State     | Texas        | Zip | 77478        |
| Country | U.S.A.                                     | Telephone | 281-285-4524 | Fax | 281-285-8569 |

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the

Please type a + sign inside this box ☐

Based on PTO/SB/01 (3/97)  
Approved for use through 9/30/98. OMB 0651-0032  
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Sole or first inventor:

Inventor's Full Name 1-00 Peter V. Coveney  
(First) (Initial) (Last)  
Inventor's Signature: *P. V. Coveney* Date: 5/6/00  
Residence Street Address 10 Park Avenue, Woodford Green, Essex IG8 0EU, United Kingdom GBX  
Country of Residence: UK Citizenship: UK

Second inventor:

Inventor's Full Name 2-00 Michael  Watkinson  
(First) (Initial) (Last)  
Inventor's Signature: *Michael Watkinson* Date: 5/6/00  
Residence Street Address 6 Wynndale Road, South Woodford, London, E18 1DX, United Kingdom GBX  
Country of Residence: UK Citizenship: UK

Third inventor:

Inventor's Full Name 3-00 Andrew  Whiting  
(First) (Initial) (Last)  
Inventor's Signature: *A. Whiting* Date: 14/6/00  
Residence Street Address 16 Kensington Way, Northwich, Cheshire CW9 8GG, United Kingdom GBX  
Country of Residence: UK Citizenship: UK

Fourth inventor:

Inventor's Full Name 4-00 Edo S. Boek  
(First) (Initial) (Last)  
Inventor's Signature: *ES Boek* Date: 30 - May - 2000  
Residence Street Address 17 Garden Walk, Cambridge CB4 3EW, United Kingdom GBX  
Country of Residence: UK Citizenship: The Netherlands